



PLUS HOT 3P



Filter housings for cartridges SX and BX

Range of housings applicable for hot water filtration. Housings PLUS HOT S 3P BX are provided with a drain funnel to protect water from pollution by back-flow, in compliance with UNI EN 1717-11/2002. PLUS HOT 3P housings are manufactured with the finest and most advanced materials under constant focus on innovative processing technologies and ceaseless modernization to ensure the absolute quality of our products.

APPLICABLE CARTRIDGES:

- FA HOT, CPP SX, PP SX, RA SX, SA SX for PLUS HOT SX
- CPP BX, PP BX, RA BX, SA BX for PLUS HOT S with discharge valve



SPECIFICATIONS

Selected raw materials.
Head and ring nut: reinforced nylon.
Bowl: reinforced nylon.
O-ring: EPDM.
Breather-valve: body polypropylene, o-ring EPDM.
S models
Discharge ball-valve: CW 617 N brass nickel plated.
Discharge plastic nipple: reinforced polypropylene.
Drain funnel: reinforced polypropylene.
> Back-flow preventing device UNI EN 1717-11/2002

IN/OUT:

1/2" - 3/4" - 1"

CERTIFICATIONS:




A range of housings is certified by IAPMO R&T to NSF/ANSI 42 - Structural Integrity Only and CSA B483.1 - Structural Integrity Only.



Housings are tested and certified under the most stringent procedures worldwide, in compliance with EAC/Ghostreghistrizia (Russia).

HOUSINGS PLUS HOT 3P

Housings PLUS HOT 3P fit to standard SX (DOE) cartridges applicable for hot water filtration: FA-HOT SX wound polypropylene cartridges, CPP SX polypropylene melt-blown cartridges, RA SX stainless steel net cartridges. Housings PLUS HOT S 3P with discharge valve fit to washable RA BX stainless steel net cartridges BX cartridges with 45 mm double o-ring collar applicable for hot water filtration.



MAX WORKING PRESSURE
 BSPP versions 8 bar (116 psi)
 NPT versions 8,6 bar (125 psi)

MAX WORKING TEMPERATURE
 45°C (113°F)
 MIN WORKING TEMPERATURE
 4°C (39,2°F)

- APPLICABLE CARTRIDGES:**
- FA HOT, CPP SX, PP SX, RA SX, SA SX for PLUS HOT SX
 - CPP BX, PP BX, RA BX, SA BX for PLUS HOT S with discharge valve



THREADS TYPE



VERSIONS



BOWL TYPE



PACKAGING





BOWLS HEIGHTS



ACCESSORIES ON DEMAND:

CODE RE9020660 LUBRIKIT+ - single-dose lubricant for housing o-ring

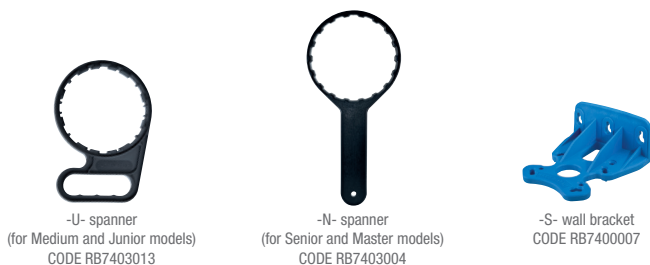

PLUS HOT 3P SX



HOUSINGS WITH PLASTIC BSPP THREADS

PART NUMBER	MODEL	SUITABLE CARTRIDGE	IN/OUT	DIMENSIONS mm			BARCODE	PCS xBOX
				A	B	C		
RA107P209	MEDIUM PLUS HOT 3P MFP SX AB	5"	1/2"	191	133	130	8021647116697	12
RA107P509	MEDIUM PLUS HOT 3P AFP SX AB	5"	3/4"	191	133	130	8021647116703	12
RA107P809	MEDIUM PLUS HOT 3P BFP SX AB	5"	1"	197	145	130	8021647116710	12
RA109P209	JUNIOR PLUS HOT 3P MFP SX AB	7"	1/2"	241	133	130	8021647116727	12
RA109P509	JUNIOR PLUS HOT 3P AFP SX AB	7"	3/4"	241	133	130	8021647116734	12
RA109P809	JUNIOR PLUS HOT 3P BFP SX AB	7"	1"	247	145	130	8021647116741	12
RA111P218	SENIOR PLUS HOT 3P MFP SX AB	10"	1/2"	315	133	130	8021647085313	12
RA111P518	SENIOR PLUS HOT 3P AFP SX AB	10"	3/4"	315	133	130	8021647071705	12
RA111P718	SENIOR PLUS HOT 3P BFP SX AB	10"	1"	321	145	130	8021647082756	12
RA115P218	MASTER PLUS HOT 3P MFP SX AB	20"	1/2"	571	133	130	8021647108746	6
RA115P518	MASTER PLUS HOT 3P AFP SX AB	20"	3/4"	571	133	130	8021647108753	6
RA115P718	MASTER PLUS HOT 3P BFP SX AB	20"	1"	577	145	130	8021647107565	6

HOUSINGS WITH PLASTIC NPT THREADS

PART NUMBER	MODEL	SUITABLE CARTRIDGE	IN/OUT	DIMENSIONS mm			BARCODE	PCS xBOX
				A	B	C		
RA107P510	MEDIUM PLUS HOT 3P AFP NPT SX AB	5"	3/4"	191	133	130	8021647186966	12
RA107P810	MEDIUM PLUS HOT 3P BFP NPT SX AB	5"	1"	197	145	130	8021647186973	12
RA109P510	JUNIOR PLUS HOT 3P AFP NPT SX AB	7"	3/4"	241	133	130	8021647186980	12
RA109P810	JUNIOR PLUS HOT 3P BFP NPT SX AB	7"	1"	247	145	130	8021647186997	12
RA111P510	SENIOR PLUS HOT 3P AFP NPT SX AB	10"	3/4"	315	133	130	8021647187000	12
RA111P710	SENIOR PLUS HOT 3P BFP NPT SX AB	10"	1"	321	145	130	8021647187017	12
RA115P510	MASTER PLUS HOT 3P AFP NPT SX AB	20"	3/4"	571	133	130	8021647187130	6
RA115P710	MASTER PLUS HOT 3P BFP NPT SX AB	20"	1"	577	145	130	8021647187147	6

PLUS HOT S 3P BX with discharge valve (only for BX cartridges)



HOUSINGS WITH PLASTIC BSPP THREADS

PART NUMBER	MODEL	SUITABLE CARTRIDGE	IN/OUT	DIMENSIONS mm			BARCODE	PCS xBOX
				A	B	C		
RA111P238	SENIOR PLUS HOT S 3P MFP BX AB	10"	1/2"	450	133	130	8021647151117	12
RA111P538	SENIOR PLUS HOT S 3P AFP BX AB	10"	3/4"	450	133	130	8021647151124	12
RA111P738	SENIOR PLUS HOT S 3P BFP BX AB	10"	1"	460	145	130	8021647151131	12
RA115P238	MASTER PLUS HOT S 3P MFP BX AB	20"	1/2"	710	133	130	8021647186898	6
RA115P538	MASTER PLUS HOT S 3P AFP BX AB	20"	3/4"	710	133	130	8021647186942	6
RA115P738	MASTER PLUS HOT S 3P BFP BX AB	20"	1"	720	145	130	8021647186959	6

HOUSINGS WITH PLASTIC NPT THREADS

PART NUMBER	MODEL	SUITABLE CARTRIDGE	IN/OUT	DIMENSIONS mm			BARCODE	PCS xBOX
				A	B	C		
RA111P540	SENIOR PLUS HOT S 3P AFP NPT BX AB	10"	3/4"	450	133	130	8021647187154	12
RA111P740	SENIOR PLUS HOT S 3P BFP NPT BX AB	10"	1"	460	145	130	8021647187161	12
RA115P540	MASTER PLUS HOT S 3P AFP NPT BX AB	20"	3/4"	710	133	130	8021647187178	6
RA115P740	MASTER PLUS HOT S 3P BFP NPT BX AB	20"	1"	720	145	130	8021647187185	6

Some items in the list are subject to minimum order quantities and/or to longer delivery term.